


In Stock NOW at Okeechobee, Medley or
Delivered Roof Top with your Tile Order

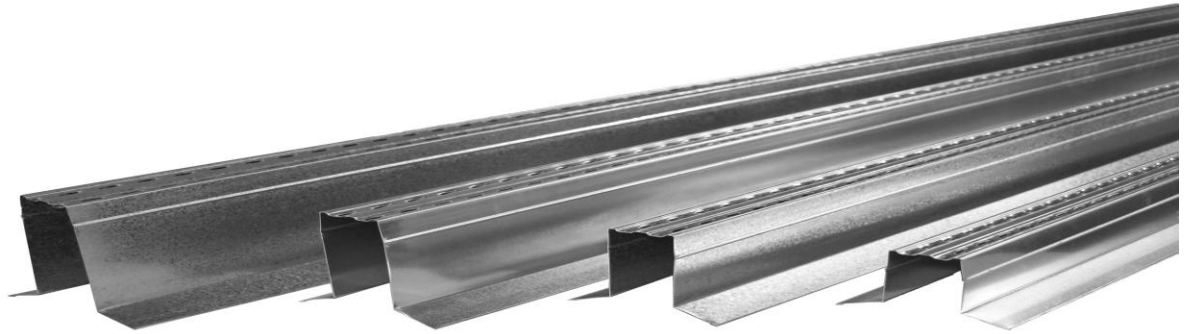

Trim Lock[™] Metal Reference Chart

Profile	Roof Pitch	Available	3.0"	3.5"	4.0"	5.0"	6.0"
Estate "S" Double Roll	Up to 6/12	Roof Top with Tile Load Service			•		
Valencia Spanish "S"	Up to 6/12	Roof Top with Tile Load Service				•	
Bella High "S"	Up to 6/12	Roof Top with Tile Load Service					•
Entegra 13" Flat Tile	Up to 6/12	Roof Top with Tile Load Service		•			
Bermuda 9" Flat	Up to 6/12	Roof Top with Tile Load Service	•				

Trim Lock[™] Metal Product Approval

Complies with Florida Building Code FL5374-R1
See www.floridabuilding.org (Section Product Approval)

Trim Lock[™] Metal Patent Information

US Patent D583,965S
US Patent Pending 11614190

Disclaimer:

- The above information is the result of field feedback. Your results may vary.
- Refer to your local building codes.
- Entegra is not responsible for installation errors - check size and fit prior to installation.
- Trim Lock[™] Metals need to be cleaned and wiped down prior to installation.
- Users need to ensure adequate contact between trim tile and approved adhesive.
- When using mortar trim tile should be inbedded into mortar at least 1-1/2".
- Above 6/12 use contractor discretion.
- Installation shall be in strict compliance with manufacturer's specifications.
- Information is subject to change without prior notice.